

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 February 2007 (01.02.2007)

PCT

(10) International Publication Number
WO 2007/013780 A1

(51) International Patent Classification:
G11B 20/10 (2006.01)

(21) International Application Number:
PCT/KR2006/002981

(22) International Filing Date: 28 July 2006 (28.07.2006)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
60/703,463 29 July 2005 (29.07.2005) US
60/716,526 14 September 2005 (14.09.2005) US
10-2006-0004048 13 January 2006 (13.01.2006) KR
10-2006-0017660 23 February 2006 (23.02.2006) KR
10-2006-0017659 23 February 2006 (23.02.2006) KR
60/816,022 22 June 2006 (22.06.2006) US

(71) Applicant (for all designated States except US): **LG ELECTRONICS INC.** [KR/KR]; 20, Yoido-dong, Youngdungpo-gu, Seoul 150-721 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **OH, Hyeon O** [KR/KR]; 306-403, Gangseon Maeul 3-danji Han-shin Apt., Juyeop 1(il)-dong, Ilsan-gu, Goyang-si,

Gyeonggi-do 151-057 (KR). **PANG, Hee Suk** [KR/KR]; 101, 4/7, 14-10, Yangjae-dong, Seocho-gu, Seoul 137-130 (KR). **KIM, Dong Soo** [KR/KR]; 502, Woorim Villa, 602-265, Namhyeon-dong, Gwanak-gu, Seoul 151-801 (KR). **LIM, Jae Hyun** [KR/KR]; 609, Parkvill Officetel, 1062-20, Namhyeon-dong, Gwanak-gu, Seoul 151-801 (KR). **KIM, Hyo Jin** [KR/KR]; 303, 258-18, Seongsan 1-dong, Mapo-gu, Seoul 121-847 (KR). **JUNG, Yang Won** [KR/KR]; 2-803, Yeoksam Hanshin Apt., Dogok-dong, Kangnam-gu, Seoul 135-270 (KR).


(74) Agents: **KIM, Young In** et al.; 15th Floor Yo Sam Building, 648-23, Yeoksam-dong, Kangnam-gu, Seoul 135-808 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: METHOD FOR SIGNALING OF SPLITTING INFORMATION

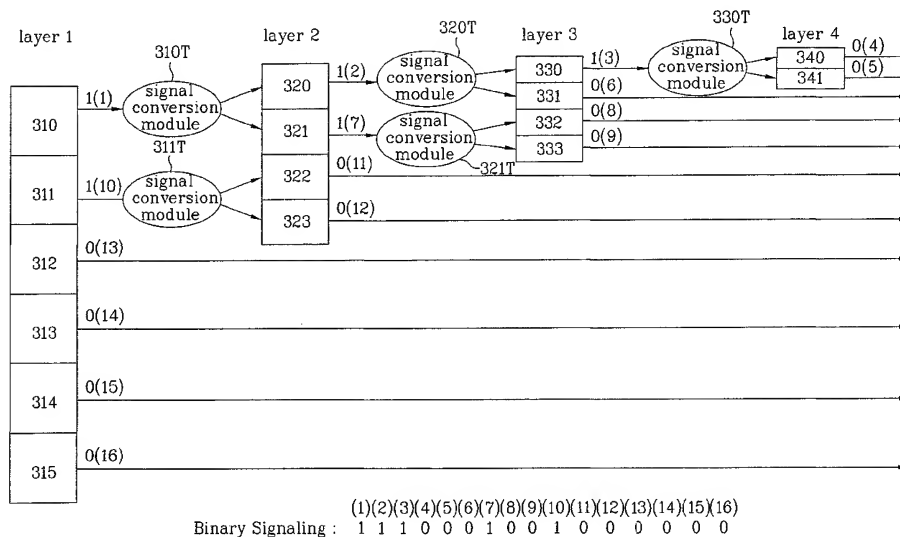

(57) Abstract: A signaling method for signal division information is disclosed. The signaling method divides a signal into several signals, and effectively represents division information of the divided signals. The present invention provides the method signaling for signaling signal division information comprising: assigning number of lower nodes equal to the number of divisions to a lower layer if a node of an upper layer is represented by a division identifier (ID) ; and un-assigning any lower node to the lower layer if the node of the upper layer is represented by a non- division identifier (ID), wherein the signal division information includes the division ID and the non-division ID indicating the presence or absence of a signal division at a node of a layer.

WO 2007/013780 A1



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METHOD FOR SIGNALING OF SPLITTING INFORMATIONTechnical Field

The present invention relates to a signaling method,
5 and more particularly to a method for dividing a signal
into several signals, and effectively representing division
information (also called "splitting information") of the
divided signals.

10 Background Art

Generally, signals may be configured in various ways
(e.g., a block, a band, and a channel.). The above-
mentioned signals can be processed without being divided
into several units within in a stationary period in which
15 signals can maintain predetermined statistical
characteristics because it is an advantage to compress
the signals.

It is preferable for the signal to be divisionally
processed in a transient period in which signal
20 characteristics are abruptly changed, because of the
prevention of signal distortion.

However, if a user desires to divisionally process
the above-mentioned signals, there is no detailed method
for signaling the divided information. Therefore, it is

difficult to effectively process the above-mentioned signals.

Disclosure of Invention

5 Accordingly, the present invention is directed to a method for signaling division information that substantially obviates one or more problems due to limitations and disadvantages of the related art.

 An object of the present invention devised to solve
10 the problem lies on a method for effectively signaling divided signals.

The object of the present invention can be achieved by providing a signaling method for signal division information comprising: assigning number of lower nodes
15 equal to the number of divisions to a lower layer if an node of an upper layer is represented by a division identifier (ID); and un-assigning any lower node to the lower layer if the node of the upper layer is represented by a non-division identifier (ID), wherein the signal
20 division information includes the division ID and the non-division ID indicating the presence or absence of a signal division at a node of a layer.

Brief Description of Drawings

The accompanying drawings, which are included to provide a further understanding of the invention, illustrate embodiments of the invention and together with the description serve to explain the principle of the invention.

In the drawings:

FIG. 1 is a conceptual diagram illustrating a signaling method for block division information according to an embodiment of the present invention;

FIG. 2 and FIG. 3 are conceptual diagram illustrating a signaling method for band and channel division information according to an embodiment of the present invention;

FIG. 4 is a conceptual diagram illustrating a method for creating a multi-channel signal according to another embodiment of the present invention; and

FIG. 5 is a conceptual diagram illustrating a signaling method for channel division information according to another embodiment of the present invention.

Best Mode for Carrying Out the Invention

Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are

illustrated in the accompanying drawings.

A signaling method for division information according to the present invention will hereinafter be described with reference to the annexed drawings.

5 The signaling method for the division information according to the present invention is classified according to signal categories.

Prior to describing the present invention, it should be noted that the above-mentioned signal is configured in
10 various ways, for example, a block, a band, and a channel.

The above-mentioned "Signaling method" may include the meaning of "Signaling" or the meaning of "Recognition of the signaled signal".

The term "Node" is a point indicating whether the
15 signal is divided or not.

The term "Spatial Information" is information capable of downmixing or upmixing a multi-channel signal.

It should be noted that the spatial information is indicative of spatial parameters, however, it is not
20 limited to the above-mentioned examples, and can be applied to other examples as necessary.

The above-mentioned spatial parameters are a Channel Level Difference (CLD) indicating a difference in energy between two channels, Inter-Channel Coherences (ICC)

indicating correlation between two channels, and Channel Prediction Coefficients (CPC) used for creating three channels from two channels.

Block division, band division, and channel division
5 will hereinafter be described in detail.

1) Block Division

A block processing is required to compress consecutive data of a time domain in the same manner as
10 in audio signals.

The term "Block Processing" indicates that an input signal is divisionally processed at intervals of a predetermined distance.

In this case, the above-mentioned interval is
15 defined as a block, and one or more blocks are combined to configure a frame.

The above-mentioned frame is indicative of a unit for transmitting/storing data.

The term "Block Division" or "Block Splitting" is
20 indicative of a specific process in which an input signal is changed to different-sized blocks during the signal processing.

The term "Block Size Information" is specific information indicating a block size acquired when the

input signal is processed while being changed to different-sized blocks.

Generally, if the signal is configured in the form of a block, the signal processing is performed using a
5 long block or a short block.

In the case of using the short block, several short blocks are combined, and the combined blocks correspond to a single long block.

However, the signal has various characteristics for
10 every interval, such that it is difficult to conclusively determine that all the signals can be processed according to the long-block signal processing scheme and the short-block signal processing scheme.

Preferably, a specific-sized block is selected from
15 among different-sized blocks suitable for signal characteristics within a specific interval, and the block division is then performed on the selected block.

In more detail, blocks are configured to have two or more different sizes. A predetermined-sized block from
20 among the two or more different-sized blocks can be selected from the frame in various ways.

For this purposes, there is a need to indicate which blocks are contained in a current frame, such that the signaling method is required for the above-mentioned

operations.

The above-mentioned signaling method is classified into a sequential signaling method and a hierarchical signaling method.

5 The sequential signaling method pre-defines the frame size (i.e., length denoted by "N"), and performs the signaling process using the number of minimum-sized blocks M.

10 In this case, the frame length "N" is a multiple of a specific M. The frame size may be a fixed value, or may be a specific value capable of being transmitted to a destination as additional information.

For example, provided that N is 2048 (N=2048), M is 256 (M=256), and the blocks are arranged in the order of
15 256 → 256 → 1024 → 512, block size information may be signaling-processed in the order of M*1, M*1, M*4, M*2 → 1, 1, 4, 2 → 0, 0, 3, 1.

The hierarchical signaling method may be classified into a method for transmitting layer's depth information
20 and a method for not transmitting the layer's depth information and a detailed description thereof will hereinafter be described with reference to the annexed drawings.

FIG. 1 is a conceptual diagram illustrating a

signaling method for block division information according to an embodiment of the present invention.

Referring to FIG. 1, each layer is denoted by a layer, and the depth of the layer is set to "5".

5 A "Layer 1" includes a first block 210, which is the longest block used as a basic unit for block division, and the length of the first block 210 is N.

Reference numbers (1), (2), ..., (a), (b), (c), and (d) indicate exemplary binary signaling sequences.

10 According to the present embodiment, the block division information indicating whether the block is divided or not is represented by a division ID (identifier) and a non-division ID. A specific number "1" is used as the division ID, and a specific number "0" is
15 used as the non-division ID.

The above-mentioned division ID and the non-division ID are represented in nodes for each layer.

The division ID indicates that a predetermined block contained in an upper layer is divided into equal halves
20 in a lower layer, and also indicates that a lower node is assigned to the lower layer.

The non-division ID indicates that a predetermined block of the upper layer is not divided by the lower layer, and also indicates that any lower node

corresponding to a node which is represented by the non-division ID is not assigned to the lower layer. To un-assign the lower node means that there is no performing additional signaling operations.

5 Since the block division information (1) of the first block 210 has the value of 1 in the uppermost layer (i.e., the Layer 1), the block division of the first block 210 is performed.

10 Layer 2 acting as the lower layer of the Layer 1 includes two blocks 220 and 221, each of which has the length of $N/2$.

15 Block division information (2) of the block 220 contained in the Layer 2 has the value of "1", and block division information (3) of the block 221 has the value of "1", such that Layer 3 acting as a lower layer of the Layer 2 includes four blocks 230, 231, 232, and 233, each of which has the length of $N/4$.

20 The block division information (4) associated with the block 230 contained in the Layer 3 has the value of "0". The block division information (5) associated with the block 231 has the value of "1". The block division information (6) associated with the block 232 has the value of "1". The block division information (7) associated with the block 233 contained in the Layer 3

has the value of "0".

Therefore, according to the block division information of the Layer 3, the block division is not performed on the blocks 230 and 233 of the Layer 3, but
5 is performed on the blocks 231 and 232 of the Layer 3.

In this case, a lower node is not assigned to a Layer 4 acting as a lower layer of the above-mentioned non-block-divided blocks 230 and 233 of the Layer 3.

The block-divided blocks 231 and 232 of the Layer 3
10 assign a lower node to a lower layer. And the presence or absence of block division is represented in the lower node.

Layer 4 has the length of $N/8$, and includes blocks 240 and 241 which are divided on block 231 of the Layer 3,
15 and also includes other blocks 242 and 243 are divided on block 232 of the Layer 3.

The block division information (8) associated with the block 240 of the Layer 4 has the value of "0". The block division information (9) associated with the block
20 241 of the Layer 4 has the value of "1". The block division information (a) associated with the block 242 of the Layer 4 has the value of "0". The block division information (b) associated with the block 243 of the Layer 4 has the value of "0".

Therefore, according to the block division information of the Layer 4, the block division is not performed on the blocks 240, 242, and 243 of the Layer 4, but is performed on the block 241 of the Layer 4.

5 In this case, a lower node is not assigned to a Layer 5 acting as a lower layer of the above-mentioned non-block-divided blocks 240, 242, and 243 of the Layer 4.

The block-divided block 241 of the Layer 4 assigns a lower node to the Layer 5, such that it indicates the
10 presence or absence of block division in the above-mentioned lower node.

The Layer 5 has the length of $N/16$, and includes blocks 250 and 251 which are divided on block 241 of the Layer 4.

15 The block division information (c) associated with the block 250 of the Layer 5 has the value of "0". The block division information (d) associated with the block 251 of the Layer 5 has the value of "0".

Therefore, each of the blocks contained in the Layer
20 4 has the value of "0", such that the hierarchical block division is not performed any more, and a block division depth of the block can be recognized.

The layout structure of blocks capable of being hierarchically-block-divided includes an $N/4$ block (i.e.,

a block having the length of $N/4$), an $N/8$ block, an $N/16$ block, an $N/16$ block, an $N/8$ block, an $N/8$ block, and an $N/8$ block.

If the signal length is N , block-divided blocks have
5 any one of the lengths (i.e., $N/2$, $N/4$, $N/8$, $N/16$, and $N/32$...), as represented by " N/x^i " (where $i = 1, 2, \dots, P$, P is an integer, and $x=2$).

In the case of representing block division
information capable of being denoted by a binary number
10 according to binary signaling sequences (1)
(2) (3) (4) (5) (6) (7) (8) (9) (a) (b) (c) (d), the block division
information can be denoted by 13 bits "1110110010000".

The above-mentioned description has disclosed an
exemplary case in which the layer's depth information is
15 not additionally represented, and can be recognized by
only block division information denoted by the division
ID and non-division ID.

However, it should be noted that the other block
division information for additionally representing the
20 layer's depth information can also be signaling-processed.

For example, the layer's depth information is
represented by a division-termination ID and a division-
continuation ID.

The above-mentioned division-termination ID is

indicative of the lowermost layer in which block division is not performed any more. The above-mentioned division-continuation ID is indicative of the remaining layers except the lowermost layer. In this case, the division-continuation ID is denoted by "1", and the division-termination ID is denoted by "0".

The depth of the layer depicted in FIG. 1 is "5", and can also be represented by "11110" using the division-termination ID "0" and the division-continuation ID "1".

The size of a sub-block can be recognized by the above-mentioned signaling method.

In this way, in the case of additionally representing the depth information, only the non-division ID can be represented at a node assigned to the lowermost layer, such that the signaling process can be performed in the range from a current layer to a previous layer of the lowermost layer.

For example, provided that the division ID is denoted by "1" and the non-division ID is denoted by "0" and the division-continuation ID is denoted by "1" and the division-termination ID is denoted by "0", a specific value indicating whether the node assigned to the lowermost layer is divided may be represented by "0"

indicating the division termination.

2) Band Division

Band division will hereinafter be described with
5 reference to FIGS. 2~3.

FIG. 2 is a conceptual diagram illustrating a method
for signaling band division information according to
another embodiment of the present invention.

FIG. 2 shows hierarchical band division configured
10 in the structure of a tree in a sub-band filterbank. A
frequency resolution of the sub-band can be defined in
various ways, and a detailed description thereof will
hereinafter be described in detail.

Compared with the block division of FIG. 1, the band
15 division of FIG. 2 includes a plurality of bands in the
uppermost layer, whereas an uppermost layer of FIG. 1 is
composed of a single long block.

According to the present embodiment, the band
division information indicating whether the band is
20 divided or not is represented by the division ID and the
non-division ID. The value of "1" is used as the division
ID, and the value of "0" is used as the non-division ID.

The division ID and the non-division ID can be
indicated at nodes for each layer.

The division ID indicates that a band of an M-th layer is divided into equal halves at an (M+1)-th layer.

The non-division ID indicates that a band of the M-th layer is not divided at the (M+1)-th layer and also
5 indicates that that any lower node corresponding to a node which is represented by the non-division ID is not assigned to the lower layer. To un-assign the lower node means that there is no performing additional signaling operations.

10 The Layer 1 acting as the uppermost layer includes first to sixth bands 310, 311, 312, 313, 314, and 315.

Band division information (1) of the first band 310 is denoted by "1". Band division information (2) of the second band 311 is denoted by "1". Band division
15 information (3) of the third band 312 is denoted by "0". Band division information (4) of the fourth band 313 is denoted by "0". Band division information (5) of the fifth band 314 is denoted by "0". Band division information (6) of the fourth band 313 is denoted by "0".

20 The above-mentioned band division information is indicated at the node assigned to the Layer 1.

According to the band division information (1) and (2), the first band 310 creates a signal conversion module 310T, and the second band 311 creates a signal

conversion module 311T, such that lower bands 320, 321, 322, and 323 are created in the Layer 2. Lower nodes are assigned to the lower bands 320, 321, 322, and 323. It should be noted that the above-mentioned signal
5 conversion module can also be called a "band conversion module" in the present embodiment.

In the meantime, the third, fourth, fifth, or sixth band 312, 313, 314, or 315 at which there is no band division does not create the band conversion module.
10 Lower bands corresponding to the Layer 2 are not also created in the third, fourth, fifth, or sixth band 312, 313, 314, or 315. Therefore, any lower node corresponding to 312, 313, 314 and 315 is not assigned to the layer 2.

The Layer 2 includes two bands 320 and 321 which are
15 divided on the band 310 of the layer 1, and also includes two bands 322 and 323 which are divided on the band 311 of the layer 1.

Band division information (7) of the band 320 is denoted by "1". Band division information (8) of the band
20 321 is denoted by "1". Band division information (9) of the band 322 is denoted by "0". Band division information (10) of the band 323 is denoted by "0".

According to the above-mentioned band division information (7) and (8), the band 320 creates a band

conversion module 320T, and the band 321 creates a band conversion module 321T, such that lower bands 330, 331, 332, and 333 are created in the Layer 3. Lower nodes are assigned to the lower bands 330, 331, 332, and 333.

5 In the meantime, the bands 322 and 323 at which there is no band division does not create the band conversion module. Lower bands corresponding to the Layer 3 are not also created in the bands 322 and 323. Therefore, a lower node is also not assigned to the bands
10 322 and 323.

The Layer 3 includes two bands 330 and 331 which are divided on the band 320 of the layer 2, and also includes two bands 332 and 333 which are divided on the band 321 of the layer 2.

15 Band division information (11) of the band 330 is denoted by "1". Band division information (12) of the band 331 is denoted by "0". Band division information (13) of the third band 332 is denoted by "0". Band division information (14) of the band 333 is denoted by
20 "0".

According to the above-mentioned band division information (11), the band 330 creates a signal conversion module 330T, and the lower bands 340 and 341 are created in the Layer 4. Lower nodes are assigned to

the lower bands 340 and 341.

In the meantime, the bands 331, 332, and 333 at which there is no band division does not create the band conversion module. Lower bands corresponding to the Layer 4 are not also created in the bands 331, 332, and 333. Therefore, a lower node is also not assigned to the bands 322 and 323. Therefore, a lower node is also not assigned to the bands 331, 332, and 333.

The Layer 4 includes two bands 340 and 341 331 which are divided on the band 330 of the layer 3.

Band division information (15) of the band 340 is denoted by "0". Band division information (16) of the band 341 is denoted by "0".

Therefore, there is no lower layer capable of performing the band division, and the signaling process is terminated. In this case, the lowermost layer is equal to the Layer 4.

In the case of representing block division information capable of being denoted by a binary number according to binary signaling sequences (1) (2) (3) (4) (5) (6) (7) (8) (9) (10) (11) (12) (13) (14) (15) (16), the block division information can be denoted by 16 bits "1100001100100000".

FIG. 3 is a block diagram illustrating a signaling

method for band division information according to another embodiment of the present invention.

Compared with FIG. 2, the band division of FIG. 3 is similar to that of FIG. 2 in light of a method for performing the band division.

However, as shown in FIG. 3, a binary signaling sequence of the band division information in FIG. 3 is different from that of FIG. 2.

Therefore, in the case of representing block division information capable of being denoted by a binary number according to binary signaling sequences (1) (2) (3) (4) (5) (6) (7) (8) (9) (10) (11) (12) (13) (14) (15) (16), the block division information can be denoted by 16 bits "1110001001000000".

The above-mentioned description has disclosed an exemplary case in which the layer's depth information is not additionally represented, and can be recognized by only band division information denoted by the division ID and non-division ID.

However, it should be noted that the other band division information for additionally representing the layer's depth information can also be signaling-processed.

For example, the layer's depth information is represented by a division-termination ID and a division-

continuation ID.

The above-mentioned division-termination ID is indicative of the lowermost layer in which band division is not performed any more. The above-mentioned division-
5 continuation ID is indicative of the remaining layers except the lowermost layer. In this case, the division-continuation ID is denoted by "1", and the division-termination ID is denoted by "0".

The depth of the layer depicted in FIGS. 2~3 is "4",
10 and can also be represented by "1110" using the division-termination ID "0" and the division-continuation ID "1".

The size of a sub-band can be recognized by the above-mentioned signaling method.

In this way, in the case of additionally
15 representing the depth information, only the non-division ID can be represented at a node assigned to the lowermost layer, such that the signaling process can be performed in the range from a current layer to a previous layer of the lowermost layer.

20 For example, provided that the division ID is denoted by "1" and the non-division ID is denoted by "0" and the division-continuation ID is denoted by "1", and the division-termination ID is denoted by "0", a specific value indicating whether the node assigned to the

lowermost layer is divided may be represented by "0" indicating the division termination.

3) Channel Division

5 Channel division information relates to channel configuration information used for channel configuration, such that a detailed description of channel division will hereinafter be described with reference to the above-mentioned channel configuration information.

10 Particularly, an example of channel configuration acquired when a multi-channel audio signal is encoded or decoded will be described in detail.

 Basic spatial information is required for coding the multi-channel audio signal. The above-mentioned basic
15 spatial information includes basic configuration information capable of indicating configuration information associated with basic environments and basic data corresponding to the basic configuration information.

 Also, the multi-channel audio coding selectively
20 requires extension spatial information. The above-mentioned extension spatial information includes extension configuration information indicating configuration information associated with extension environments and extension data corresponding to the

extension configuration information. The configuration information of the above-mentioned extension environment may exist one or more. The above-mentioned extension environment can be identified by a type ID.

5 In the meantime, the channel configuration referred by the above-mentioned multi-channel signal coding is mainly classified into two channel configurations, i.e., a basic channel configuration and an extension channel configuration.

10 One or more channel configuration information is used as the above-mentioned basic channel configuration information. Particularly, the basic channel configuration information indicates a single channel configuration information selected from among several
15 channel configuration information.

For the convenience of description, the basic channel configuration information is referred to as "fixed channel configuration information", and multiple channels (i.e., a multi-channel) created by the fixed
20 channel configuration information is referred to as a "fixed output channel".

Fixed channel configuration information and associated channel configuration data are required to create the above-mentioned fixed output channel.

The fixed channel configuration information is indicative of a single channel configuration component from among several pre-established channel configuration components. The above-mentioned pre-established channel configuration may be represented in various ways. For example, the channel may be configured in the form of "5-1-5", "5-2-5", "7-2-7", or "7-5-7".

The above-mentioned "5-2-5" configuration is indicative of a specific channel structure in which six input channels are down-mixed in two channels, and the down-mixed channels is outputted to six channels. The remaining channel configurations other than the "5-2-5" configuration have the same channel structure as that of the "5-2-5" configuration.

The above-mentioned fixed channel configuration information is contained in the basic configuration information, and data associated with the fixed channel configuration information is contained in basic data.

A variety of parameters may be used as the above-mentioned basic data, for example, a Channel Level Difference (CLD) parameter indicating a difference in energy between two channels, an Inter-Channel Coherences (ICC) parameter indicating correlation between two channels, and a Channel Prediction Coefficients (CPC)

parameter used creating three channels from two channels.

The above-mentioned extension channel configuration indicates a channel configuration formed after the fixed channel configuration.

5 The above-mentioned extension channel configuration is arbitrarily formed by encoded signals. For the convenience of description, the extension channel configuration information is referred to as arbitrary channel configuration information, and the multi-channel
10 created by the arbitrary channel configuration information is referred to as an arbitrary output channel.

 The above-mentioned arbitrary channel configuration information is contained in the extension configuration information, and is identified by a type ID called a
15 channel ID.

 The arbitrary channel configuration data corresponding to the arbitrary channel configuration information is contained in the extension data.

 If required, the above-mentioned arbitrary channel
20 configuration data may use only the CLD parameter indicating a difference in energy between two channels for a simple operation.

 The arbitrary channel configuration information is represented by the division ID and the non-division ID.

The division ID acting as a constituent element of the above-mentioned arbitrary channel configuration information indicates the increase the number of channels. The non-division ID indicates a specific case in which
5 there is no change in the number of channels.

For example, the division ID indicates that one input channel is converted to two output channels. Non-division ID indicates that an input channel is outputted without any change of number of channels.

10 In the case of representing the division ID at an node of an upper layer assigned to the channel of the upper layer, lower channels are created in the lower layer, and lower nodes corresponding to the created channels are assigned to the lower layer.

15 However, in the case of representing the non-division ID at the node of the upper layer assigned to the channel of the upper layer, the lower channels are not created in the lower layer, such that lower nodes corresponding to the lower channels are not assigned to
20 the lower layer.

A method for representing the above-mentioned arbitrary channel configuration information using the division ID and the non-division ID will hereinafter be described with reference to FIGS. 2~3.

FIGS. 2~3 show not only the above-mentioned band division but also channel division.

Detailed description of FIG. 2 will be firstly described as follows.

5 The Layer 1 acting as the uppermost layer includes six bands 310, 311, 312, 313, 314, and 315. The aforementioned bands 310, 311, 312, 313, 314, and 315 may serve as the above-mentioned fixed multi-channels, respectively. According to the present invention, the
10 division ID is denoted by "1", and the non-division ID is denoted by "0".

A method for representing the arbitrary channel configuration information sequentially indicates the value "0" or 1" contained in the nodes assigned to the
15 channels 310, 311, 312, 313, 314, and 315 of the Layer 1.

The method for representing the arbitrary channel configuration information sequentially indicates the value "0" or 1" contained in the nodes assigned to the channels 320, 321, 322, and 323 of the Layer 2.

20 The method for representing the arbitrary channel configuration information sequentially indicates the value "0" or 1" contained in the nodes assigned to the channels 330, 331, 332, and 333 of the Layer 3.

The method for representing the arbitrary channel

configuration information sequentially indicates the value "0" or 1" contained in the nodes assigned to the channels 340 and 341 of the Layer 4.

In other words, the above-mentioned method
5 sequentially indicates whether the number of channels increases at nodes of the upper layer, and then sequentially indicates whether the number of channels increases at nodes of the lower layer.

The arbitrary channel configuration information
10 according to the above-mentioned method is represented by 16 bits "1100001100100000".

For the convenience of description, the method for representing the arbitrary channel configuration information is referred to as a "hierarchical priority
15 method".

According to the method for representing the arbitrary channel configuration information as shown in the FIG. 3, if a first node of a upper layer is denoted by "1" when the signaling result is acquired from the
20 first node of the upper layer, lower nodes corresponding to the first node of the upper layer indicate whether the number of channels sequentially increases. If the first node of the upper layer is denoted by "0" when the signaling result is acquired from the first node of the

upper layer, a current node moves to a second node of the upper, such that the second node indicates that the number of channels sequentially increases. Therefore, the arbitrary channel configuration information acquired by
5 the above-mentioned method is represented by 16 bits "1110001001000000".

For the convenience of description, the method for representing the arbitrary channel configuration information is referred to a "branch priority method".

10 A method for creating the fixed output channel and the arbitrary output channel will hereinafter be described with reference to FIG. 4.

FIG. 4 is a conceptual diagram illustrating a method for creating a multi-channel signal according to the
15 present invention.

Referring to FIG. 4, an arbitrary output channel (y) is created by calculation between a down-mix signal (x) and a basic matrix (m1), and another arbitrary output channel (z) is created by calculation between a fixed
20 output channel (y) and a post matrix (m2). Two or more basic matrixes (m1) may exist as necessary.

Configuration elements of the basic matrix (m1) may be acquired by using at least one of CLD, ICC, CPC and the above-mentioned fixed channel configuration

information.

Configuration elements of the post matrix (m2) may be acquired by using CLD and the above-mentioned arbitrary channel configuration information.

5 A method for creating the arbitrary output channel will hereinafter be described in detail.

Firstly, a method for configuring an arbitrary channel using the arbitrary channel configuration information will be described in detail.

10 An exemplary method for representing the above-mentioned arbitrary channel configuration information using the above-mentioned branch priority method will be described.

15 The above-mentioned exemplary method sequentially recognizes the division ID and the non-division ID, which act as the configuration components of the arbitrary channel configuration information, and performs the signal processing according to the recognized ID.

20 If the recognized ID is determined to be the division ID, a single input channel is connected to the channel conversion module which is an example of the signal conversion, resulting in the creation of two lower channels.

Otherwise, if the recognized ID is determined to be

the non-division ID, the above-mentioned input channel is outputted without any change of the number of channels.

A detailed description thereof will hereinafter be described.

5 At a first stage, an initial value of the number of IDs to be decoded is set to "1", and an initial value of the number of arbitrary output channels is set to "0", and an initial value of the number of channel conversion modules is set to "0".

10 At a second stage, an ID to be decoded is recognized.

At a third stage, if the recognized ID is determined to be the division ID, the number of channel conversion modules increases by 1, and the number of IDs to be recognized increases by 1.

15 If the recognized ID is determined to be the non-division ID, the number of arbitrary output channels increases by 1, and the number of IDs to be recognized is decreased by 1.

20 Until the number of IDs to be decoded reaches "0", the above-mentioned second and third stages are repeated.

The above-mentioned signal processing method is repeated according to the number of fixed output channels.

For example, the arbitrary channel configuration acquired when the arbitrary channel configuration

information is denoted by "11100010010000" is shown in FIG. 3. In this case, the "1" means the division ID, and "0" means the non-division ID.

The number of "1"s indicates the number of channel
5 conversion modules (i.e., a signal conversion module of FIG. 3), and the number of "0"s indicates the number of arbitrary output channels.

In the meantime, the fixed output channels may be rearranged (i.e., re-mapped) in different orders, and the
10 arbitrary output channel may be then created, as shown in FIG. 5.

FIG. 5 is a conceptual diagram illustrating a method for signaling channel division information according to the present invention.

15 Referring to FIG. 5, the fixed output channels 310, 311, 312, 313, 314, and 315 are re-arranged by the re-mapping module 100. The re-arranged fixed output channels 310', 311', 312', 313', 314', and 315' act as the channels of the uppermost layer, such that the above-mentioned
20 arbitrary output channel is created. Needless to say, the above-mentioned arbitrary output channels may be re-arranged or re-mapped in different orders.

In the meantime, if channel mapping information for mapping the channels of the arbitrary channel configuration

information to a speaker is contained in the arbitrary channel configuration information, the arbitrary output channel may also be mapped to the speaker.

The above-mentioned description has disclosed an
5 exemplary case in which the layer's depth information is not additionally represented, and can be recognized by the arbitrary channel configuration information denoted by the division ID and non-division ID.

However, it should be noted that the other arbitrary
10 channel configuration information for additionally representing the layer's depth information can also be represented.

For example, the layer's depth information is represented by a division-termination ID and a division-
15 continuation ID.

The above-mentioned division-termination ID is indicative of the lowermost layer in which channel division is not performed any more. The above-mentioned division-continuation ID is indicative of the remaining
20 layers except the lowermost layer. In this case, the division-continuation ID is denoted by "1", and the division-termination ID is denoted by "0".

The depth of the layer depicted in FIGS. 2~3 is "4", and can also be represented by "1110" using the division-

termination ID "0" and the division-continuation ID "1".

In this way, in the case of additionally representing the depth information, only the non-division ID can be represented at a node assigned to the lowermost layer, such that the signaling process can be performed in the range from a current layer to a previous layer of the lowermost layer.

For example, provided that the division ID is denoted by "1" and the non-division ID is denoted by "0" and the division-continuation ID is denoted by "1", and the division-termination ID is denoted by "0", a specific value indicating whether the node assigned to the lowermost layer is divided may be represented by "0" indicating the division termination.

Although the above-mentioned situation actually occurs, the lowermost layer can be recognized by the above-mentioned depth information, and it is assumed that the omitted value "0" exists, such that the above-mentioned arbitrary output channel can be configured.

In the meantime, although the above-mentioned arbitrary channel configuration information is transmitted to the decoder, it should be noted that the decoder may not use the received arbitrary channel configuration information as necessary. The above-mentioned operations

of the decoder may occur in an exemplary case in which the decoder recognizes the arbitrary channel configuration information and the size of the arbitrary channel configuration information, but skips over a predetermined
5 range corresponding to the above-mentioned size.

It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the
10 present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

Industrial Applicability

15 A signaling method for division information according to the present invention has the following effects.

Firstly, if a predetermined-sized long block is divided into different-sized short blocks, the above-mentioned signaling method according to the present
20 invention can perform the signaling of the hierarchical block division information using minimum number of bits.

Secondly, the signaling method according to the present invention need not additionally transmit specific information indicating the number of bits used for the

signaling process, and can recognize not only the depth of a divided layer by a signaled signal but also the end of the signaled signal.

Thirdly, the signaling method according to the
5 present invention can divide a plurality of sub-bands into number of different-sized sub-bands (e.g., sub-bands having different frequency bandwidths) using a minimum number of bits.

Fourthly, the signaling method according to the
10 present invention can perform the signaling of specific information associated with an upmixing process, which allows a signal received in input channel(s) to be outputted via many more output channels than the input channel(s).

15

What is Claimed is:

1. A signaling method for signal division information comprising:

5 assigning number of lower nodes equal to the number of divisions to a lower layer if a node of an upper layer is represented by a division identifier (ID); and

 un-assigning any lower node to the lower layer if the node of the upper layer is represented by a non-division
10 identifier (ID),

 wherein the signal division information includes the division ID and the non-division ID indicating the presence or absence of a signal division at a node of a layer.

15 2. The method of claim 1, further comprising:
 sequentially signaling nodes of the upper layer; and
 sequentially signaling nodes of the lower layer.

 3. The method of claim 1, further comprising:
20 signaling a lower node of the lower layer corresponding to a first node of the upper layer if the first node of the upper layer is represented by the division ID; and

 signaling a second node of the upper layer if the

first node of the upper layer is represented by the non-division ID,.

4. The method of any one of claim 1 to claim 3,
5 wherein a depth is recognized from the signal division information.

5. The method of claim 1, further comprising:
signaling layer's depth information.

10

6. The method of claim 5, wherein the layer's depth information is represented by a variable number of bits.

7. The method of claim 6, wherein the layer's depth
15 information is represented by a division-termination ID if the layer is determined to be a lowermost layer, and is represented by a division-continuation ID if the layer is not determined to be the lowermost layer.

20 8. The method of claim 7, further comprising:
signaling nodes of assigned to an (M-1)-th layer if the lowermost layer is an M-th layer.

FIG. 1



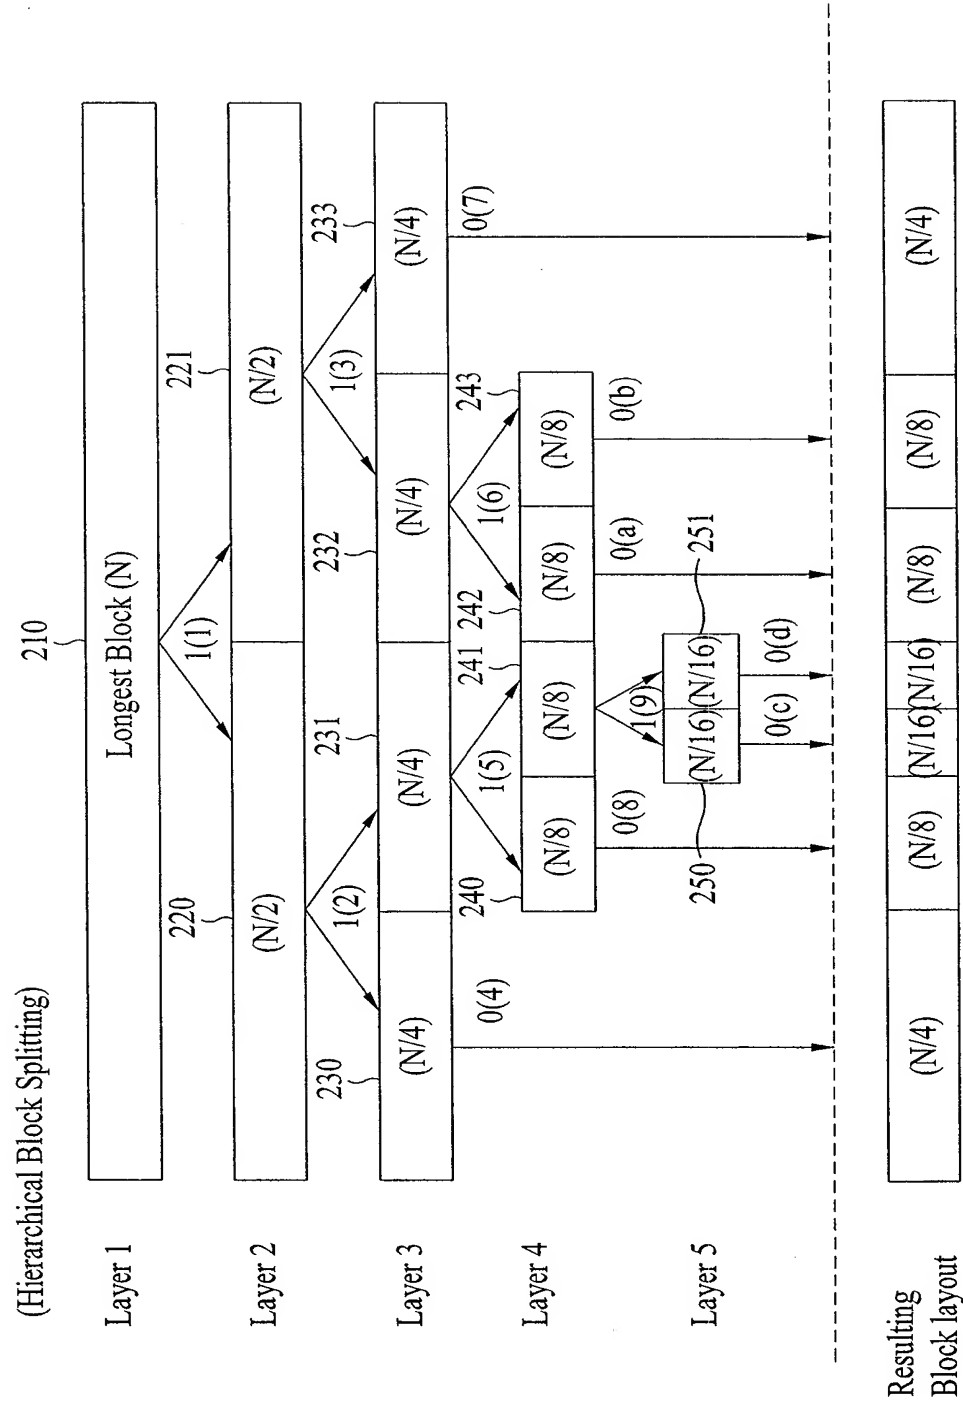


FIG. 2

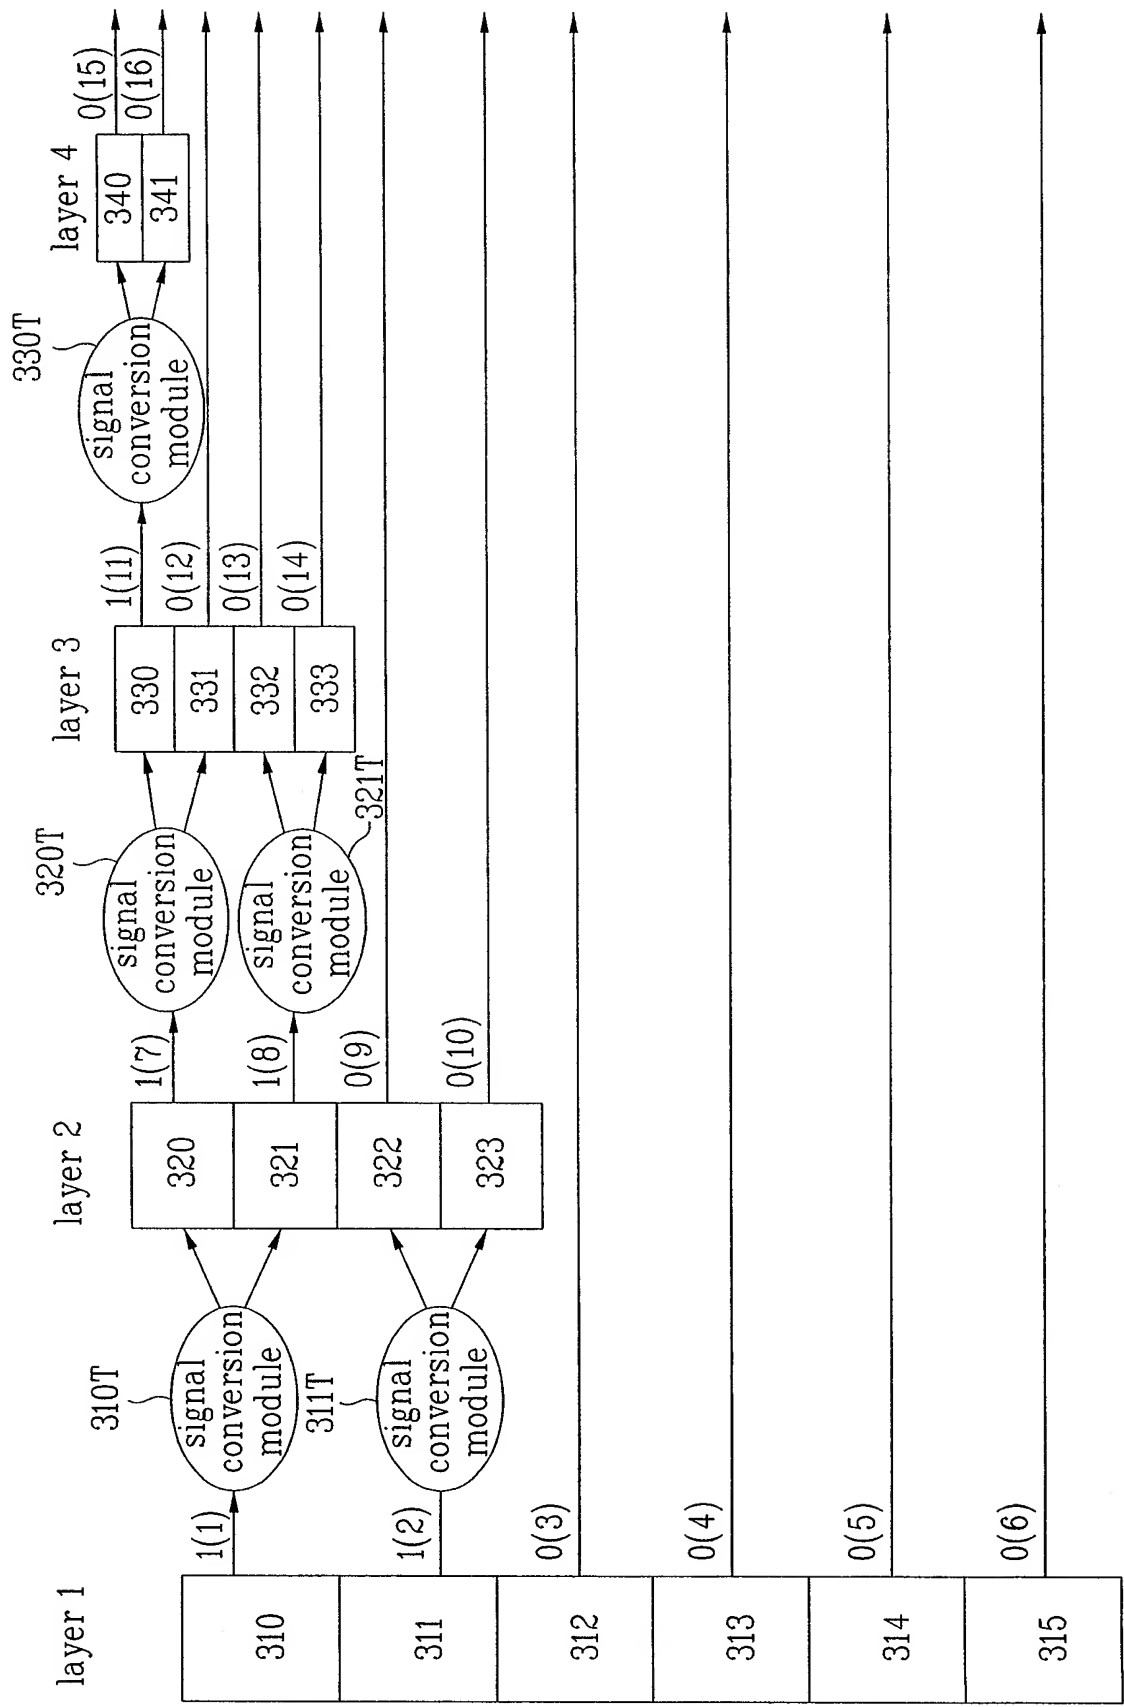

Binary Signaling : 1 1 0 0 0 0 1 1 0 0 1 0 0 1 0 0 0 0
(1)(2)(3)(4)(5)(6)(7)(8)(9)(10)(11)(12)(13)(14)(15)(16)

FIG. 3

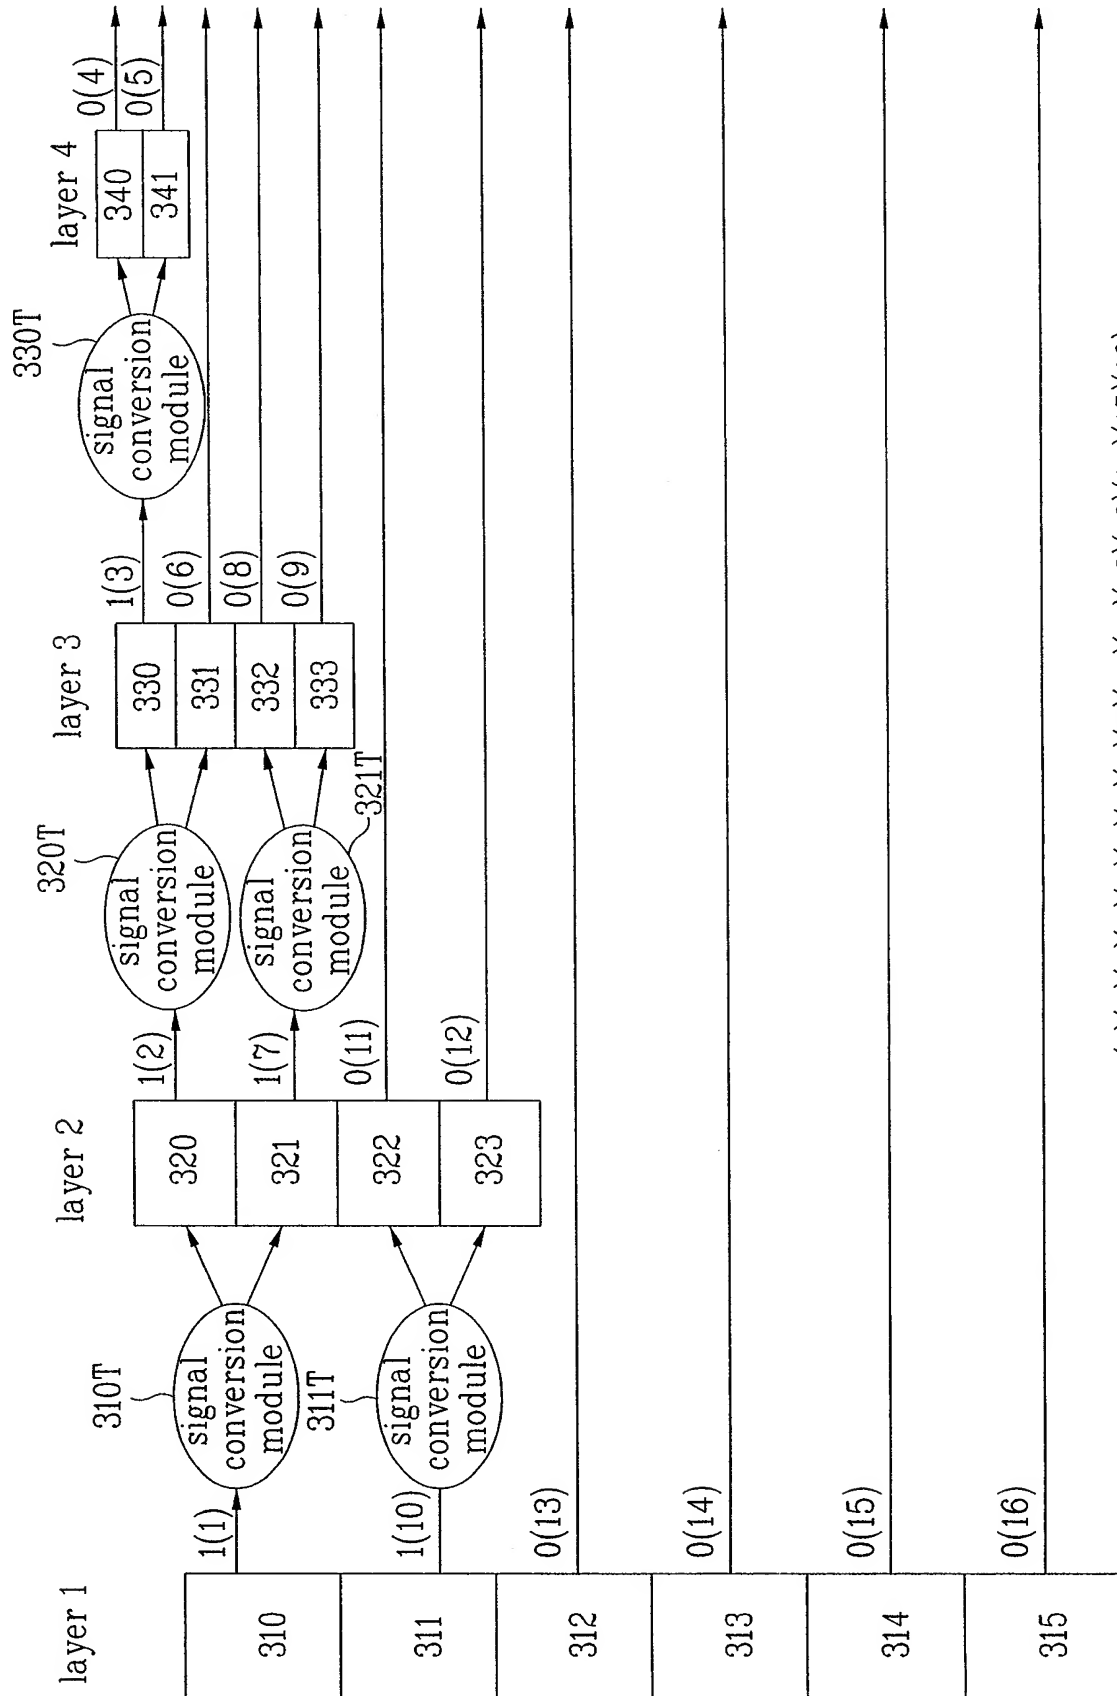

(1)(2)(3)(4)(5)(6)(7)(8)(9)(10)(11)(12)(13)(14)(15)(16)

Binary Signaling : 1 1 1 0 0 0 1 0 0 1 0 0 1 0 0 0

FIG. 4


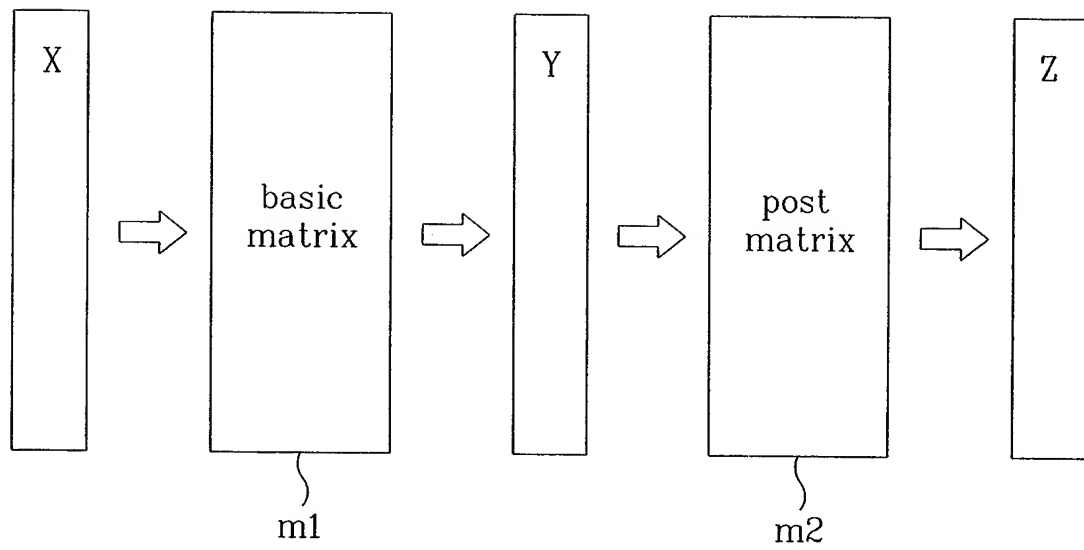


FIG. 5

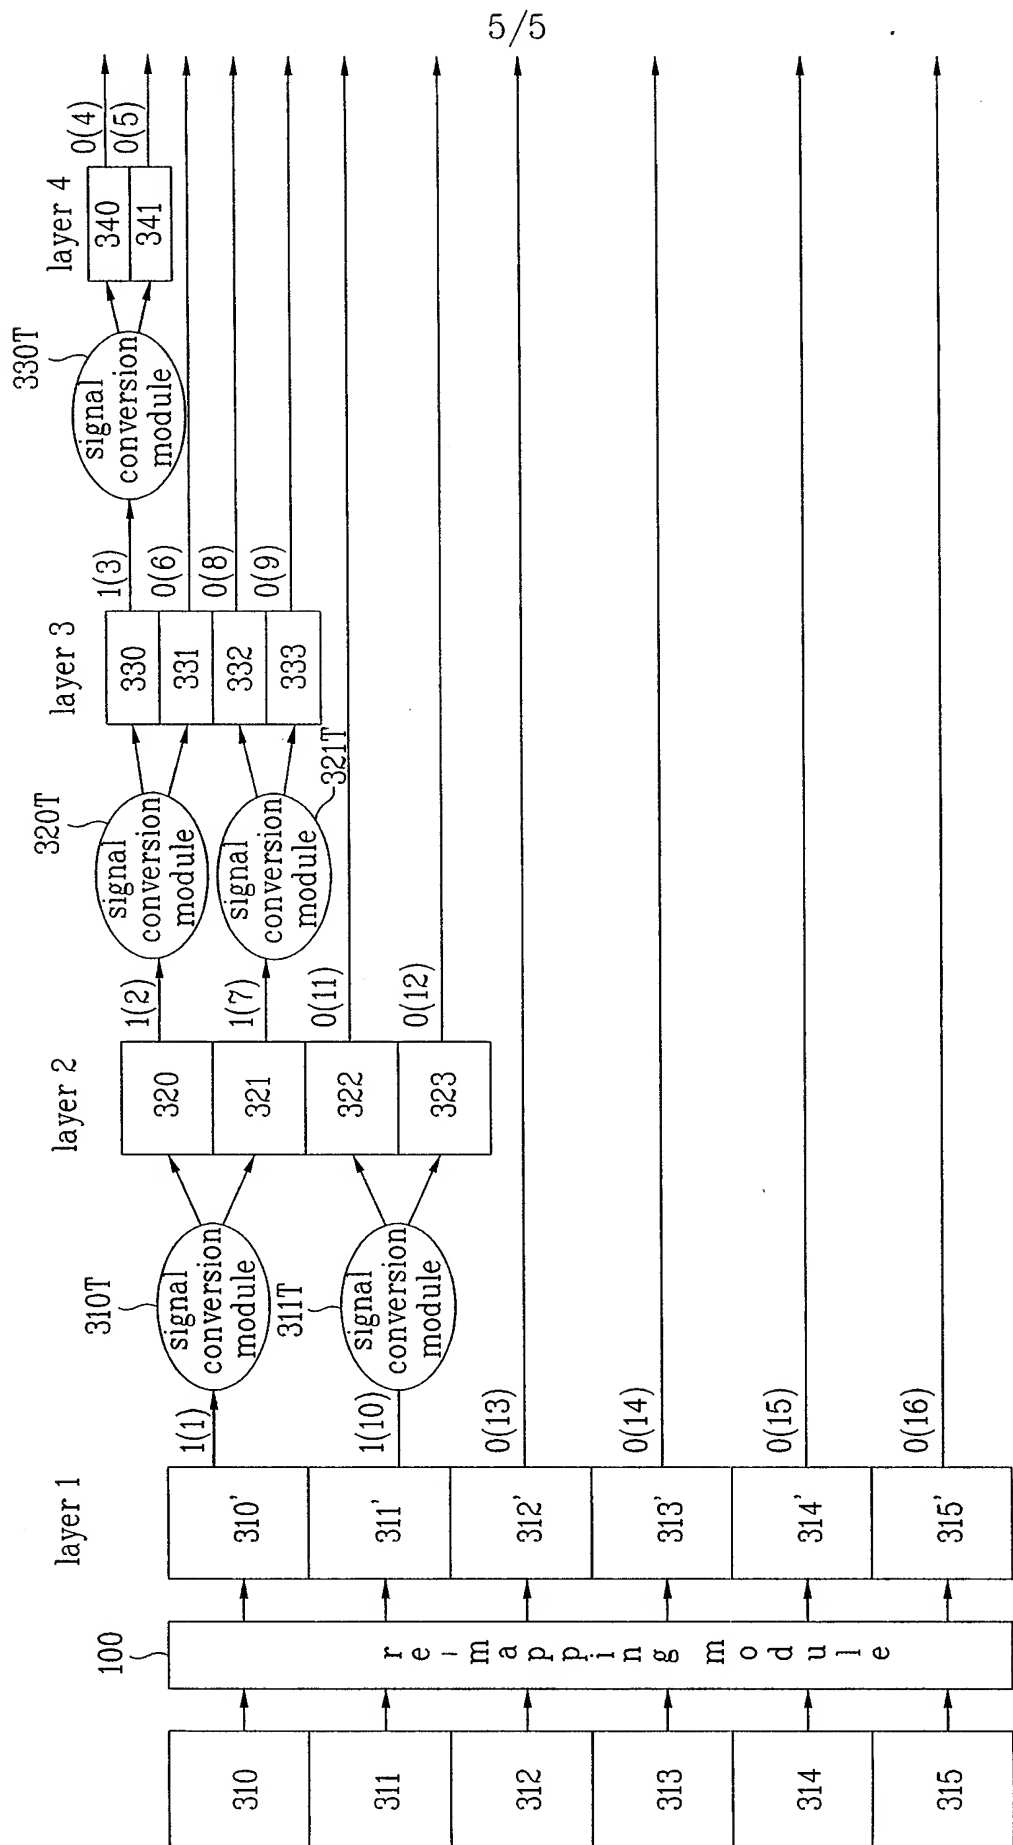

Binary Signaling : 1 1 1 0 0 0 1 0 0 1 0 0 1 0 0 0 0 0 0

(1)(2)(3)(4)(5)(6)(7)(8)(9)(10)(11)(12)(13)(14)(15)(16)

INTERNATIONAL SEARCH REPORT

 International application No.
PCT/KR2006/002981
A. CLASSIFICATION OF SUBJECT MATTER*G11B 20/10(2006.01)i*

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G11B 20/10 G10L 21/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

 Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKIPASS "audio, signal, multi, channel, splitting, node, identifier, CLD(Channel Level Difference, ICC(Inter Channel Coherences), CPC(Channel Prediction Coefficients)"
C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 03/090208 A1 (KONINKLIJKE PHILIPS ELECTRONICS N.V.) 30 October 2003 See the whole document	1
A	WO 03/090207 A1 (KONINKLIJKE PHILIPS ELECTRONICS N.V.) 30 October 2003 See the whole document	1
A	US 2003/0035553 A1 (Frank Baumgarte et al.) 20 February 2003 See the whole document	1
A	WO 03/090206 A1 (KONINKLIJKE PHILIPS ELECTRONICS N.V.) 30 October 2003 See the whole document	1
P,A	US 2006/0116886 A1 (Junghoe Kim et al.) 01 June 2006 See the whole document	1



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 NOVEMBER 2006 (17.11.2006)

Date of mailing of the international search report

20 NOVEMBER 2006 (20.11.2006)

Name and mailing address of the ISA/KR


 Korean Intellectual Property Office
920 Dunsan-dong, Seo-gu, Daejeon 302-701,
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

KIM, Yong Woong

Telephone No. 82-42-481-5698



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2006/002981

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
W003090208A1	30.10.2003	AU2003219426A1 BR0304540A CN1647155A JP2005523480T	03.11.2003 20.07.2004 27.07.2005 04.08.2005
W003090207A1	30.10.2003	AU2003216686A1 BR0304542A CN1647156A JP2005523479T	03.11.2003 20.07.2004 27.07.2005 04.08.2005
US20030035553A1	20.02.2003	NONE	
W003090206A1	30.10.2003	AU2003216682A1 BR0304541A CN1647157A JP2005523624T	03.11.2003 20.07.2004 27.07.2005 04.08.2005
US2006116886A	01.06.2006	CN1783728A EP01667111A1 JP2006166447A KR2006060927A	07.06.2006 07.06.2006 22.06.2006 07.06.2006